

भाकृंअनुप-राष्ट्रीय केला अनुसंधान केंद्र (भारतीय कृषि उनुसंधान परिषद) तोगमले रोड तायन्त्र पोरू तिरुष्यिरापढ़ि.-६२० १०२. तमिलनाड

ICAR - National Research Centre for Banana (Indian Council of Agricultural Research) Thogamalai Road, Thayanur P.O. Tiruchirapalli - 620 102, Tamil Nadu, India



F.No.9-4(45)/2016-Estt./ 2290 - 2298

Date: 28.01.2017

To

Sub

Strengthening of existing Net House at ICAR - NRC for Banana, Trichy - Reg.

Sir/s,

Quotations are invited by the Director, ICAR - NRC for Banana, Trichy, for the work mentioned in the tabular column below:

Sl.	Description	Qty.
No.		VI-2020 V I 2020
1.	Strengthening of existing Net house	1
325	(As per sketch and specifications enclosed)	Job.

NOTE: RATES FOR MATERIALS INCLUDING TRANSPORTATION AND LABOUR REQUIRED FOR "Strengthening of existing Net House as per the specifications and drawings furnished HAS TO BE QUOTED BY THE CONTRACTOR.

You are requested to quote your competitive rate (s) for undertaking the above work. Your quotation addressed to the Director, ICAR – National Research Centre for Banana, Thogamalai Road, Thayanur Post, Tiruchirapalli – 620 102 (T.N.), should reach this office on or before 10.02.2017 by 3.00PM in a sealed cover superscribing quotation for "Strengthening of existing Net House".

The right to accept or to reject all or any of the quotation in part or full is reserved.

NOTE:

You are requested to send your quotations through "SPEED POST" only and not through "COURIER SERVICE".

Yours faithfully,

1. Saltu6

Senior Administrative Officer

Encl.: As above.

Copy to:

The Chairman (Works)

The Chairman (PMEC)

The Nodal Officer (CPPP)

PS to Director

Dr.M.S.Saraswathi, Principal Scientist & Indentor

Mr.D.R.C.Moorthy, Tech.Officer


Phone: 0431-2618125 | Fax: 0431-2618125

Email: director.nrcb@icar.gov.in | directornrcb@gmail.com

Skype: nrcb.director | website: www.nrcb.res.in

for uploading in NRCB website for uploading in CPP Portal

स्वच्छ = भारत

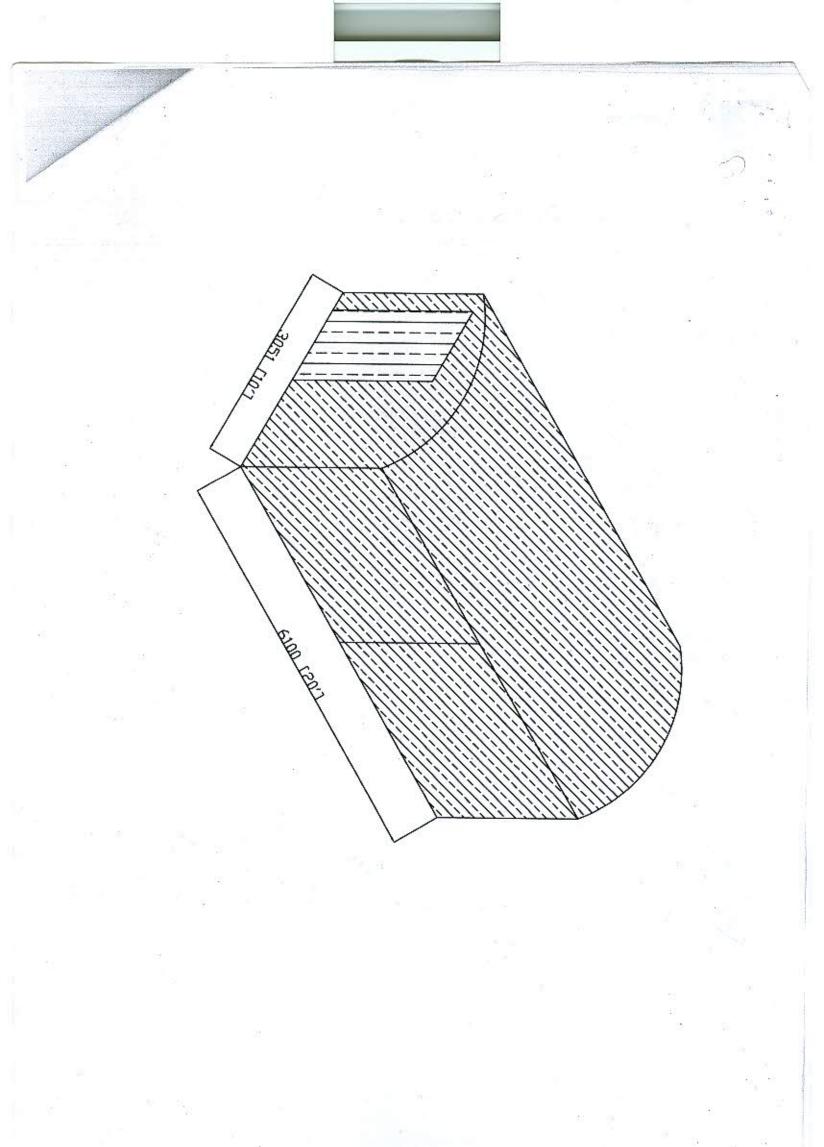

ABSTRACT OF COST

Repair of existing Net house

SLNo DSR No.		Description		Unit	Rate	Amount
1	2	EARTH WORK	Qty			
1.1	2.8	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m.			Δ.	
1.1.1	2.8.1	All kinds of soil.	10.00	cum		
1.2	2.25	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m.	5.00	cum	4	94
2	4	CONCRETE WORK				
2.1		Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:				
2.1.2		1:5:10 (1 cement : 5 coarse sand : 10 graded stone aggregate 40 mm nominal size)	3.00	cum		
4	6	BRICK WORK				0.00
4.1		Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 5.0 in foundation and plinth				
4.1.1	6.1.2	Cement mortar 1:6 (1 cement : 6 coarse sand)	8.00	cum		
5.3		6 mm thick factory made polycarbonate sheet for panelling of aluminium door, roof, wall sides, curved portion and all complete as per manufacturer's specification and fixed with zig zag springs, GI clamps, rubber beadings, clips etc to complete as per direction of Engineer-in-charge.				B
5.3.1		clear/gray multi wall polycorbonate sheet	220.00	sqm		y .
6	10	STEEL WORK		2.4.11		

	13					
6.1		Steel work in built up GI tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete. 75mm, 60 mm,40 mm,25 mm square GI tubes, Flats 25 x 3mm of various sizes G.I Tubes		kg		
7.1	11.26	cuddappa slab laid over and jointed with grey cement slurry mixed with pigment to match the shade of the slab, including rubbing and polishing complete with base of cement mortar 1:4 (1 cement: 4 coarse sand): for shelf for pots				
7.1.1	11.26.1	25 mm thick	25.00	sqm		
8	13	FINISHING				
8.1	13.1	12 mm cement plaster of mix :			1	
8.1.1	13 1 2	1:6 (1 cement: 6 fine sand)	THE RESERVED IN		iliani in a	
	-		30.00	sqm		
8.2	13.2	15 mm cement plaster on the rough side of single or half brick wall of mix :				
8.2.1	13.2.2	1:6 (1 cement: 6 fine sand)	20.00			
8.3	13.46	Finishing walls with Acrylic Smooth exterior paint of required shade :	20.00	sqm		
8.3.1	13.46.1	New work (Two or more coat applied @ 1.67 ltr/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm)	50.00	sgm		
8.4	13.61	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade :				
8.4.1	13.61.1	Two or more coats on new work			İ	<u> </u>
9	17	SANITARY INSTALLATIONS	20.00	sqm		
9.1	17.11	Providing and fixing white vitreous china laboratory sink with C.I. brackets, C.P. brass chain with rubber plug, 40 mm C.P brass waste and 40mm C.P. brass trap with necessary C.P. brass unions complete, including painting of fittings and brackets, cutting and making good the wall wherever required:				
9.1.1	17.11.2	Size 600x450x200 mm	* 00		Former 3	
9.2	17.28	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete.	1.00	each		
	Economic Commission					M
9.2.1	17.28.2	Flexible pipe		AND THE	An manuscripted	

10	18	WATER SUPPLY				T
10.1	18.7	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, including fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer in Charge. Internal work - Exposed on wall				
10.1.1	18.7.2	20 mm nominal outer dia Pipes	5.00	metre	Landing	
10.4	18.5	Providing and fixing C.P. brass long nose bib cock of approved quality conforming to IS standards and weighing not less than 810 gms.				
10.4.1	18.50.1	15 mm nominal bore	1.00	each		-
11.1.1	21.1.2	For shutters of doors, windows including providing and fixing hinges/ pivots and making provision for fixing of fittings wherever required including the cost of EPDM rubber /neoprene gasket required including all fittings			jā!	- I I I I I I I I I I I I I I I I I I I
1.1.1.	21.1.2.1	Powder coated aluminium	3.00	sqm		
						1
		Total				
		Add Contingencies				
	9.	Grand Total				
					100	
		.:				
		3				