



भाकृअनुप-राष्ट्रीय केला अनुसंधान केंद्र
(भारतीय कृषि अनुसंधान परिषद)
थोगमलै रोड, थायानूर पोस्ट,
तिरुचिरापल्लि - 620 902, तमिलनाडु

ICAR - National Research Centre for Banana
(Indian Council of Agricultural Research)
Thogamalai Road, Thayanur P.O.
Tiruchirapalli - 620 102, Tamil Nadu, India



F.No.9-4(55)/2017-2018-Estt. / 4544.

Date: 01.12.2017

QUOTATION INVITING NOTICE

Sub : Quotation inviting notice for the repair of Glass House / Transgenic Glass House at the ICAR – NRC for Banana, Trichy – Reg.

Dear Sirs,

Quotations are invited by the Director, ICAR – NRC for Banana, Trichy, for the “Repair of Glass House / Transgenic Glass House” at the ICAR – NRCB, Trichy, as per details furnished and specifications furnished overleaf.

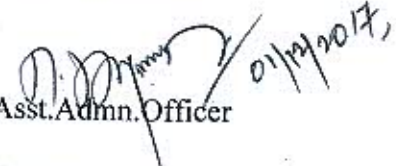
Sl. No.	Name of the work	Qty.
1.	Glass House - as per specifications furnished in enclosure	1 Job.
2.	Transgenic Glass House - as per specifications furnished overleaf	1 Job

NOTE : RATES FOR MATERIALS AND LABOUR REQUIRED FOR “Repair of Glass House / Transgenic Glass House” has to be quoted by the contractor.

You are requested to quote your competitive rate (s) for undertaking the above work. Your quotation addressed to the Director, ICAR – National Research Centre for Banana, Thogamalai Road, Thayanur Post, Tiruchirapalli – 620 102 (T.N.), should be uploaded in the e-procurement Central Public Procurement portal on or before **15.12.2017 by 3.00PM.**

The right to accept or to reject all or any of the quotation in part or full is reserved.

Yours faithfully,


Asst. Admn. Officer

Copy to:

1. The Nodal Officer- CPPP for uploading in CPP Portal
2. The Chairman-PMEC for uploading in NRCB website
3. The Chairman (WLM)
4. The Member Secretary (WLM)

Mrs. L.S.S.
P. upload
R. S. Jey

**ICAR – NRC for Banana
Trichy – 620 102**

Details of work

i) Transgenic Glass House repair

Sl. No	Description	Quantity	Rate. Rs	Amount Rs.
01	<p>Providing and fixing of Cooling pad size of thickness-4" (100mm) with UPVC enclosure (for rust free structure) for box type fixing arrangement for cooling pad with water inlet pipe 1" size (25mm) and water outlet pipe 4"size (100mm) upto ground water storage tank (all in UPVC materials)</p> <p>Completing the work, including fixing of cooling pads in a UPVC enclose arrangement, with valve arrangement, extra collecting arrangement for spill over water from cooling pad during running</p> <p>All inlet and outlet water supply arrangements from sump - cooling pad –again to sump</p> <p>8"x4" -3Nos 7' x4 – 3Nos</p>	20 sq.m		
02	Providing and fixing of 1-HP motor with suction and delivery pipeline arrangement from tank to cooling pad including the electrical power supply, wiring work and all materials	4 nos.		
03	Providing and fixing of Temperature controller with sensor unit, wiring to temperature controller unit with any other required materials to complete the work	3 nos		
04	Providing and fixing of single phase, axial slow speed exhaust fan with motor, wiring work to motor and connected to temperature controller and cooling pad pump , cutting of existing poly carbonate sheet and making of frame ,all work to complete	3 nos		
05	Supplying of Single phase, axial slow speed exhaust fan with motor, for spare purpose	1 no		
Total				

**ICAR – NRC for Banana
Trichy – 620 102**

Details of work

ii) Glass House repair

Sl. No	Description	Qty	Rate. Rs	Amount Rs.
01	<p>Providing and fixing of Cooling pad size of thickness-4" (100mm) with UPVC enclosure (for rust free structure) for box type fixing arrangement for cooling pad with water inlet pipe 1" size (25mm) and water outlet pipe 4"size (100mm) upto ground water storage tank (all in UPVC materials)</p> <p>Completing the work, including fixing of cooling pads in a UPVC enclose arrangement, with valve arrangement, extra collecting arrangement for spill over water from cooling pad during running</p> <p>All inlet and outlet water supply arrangements from sump -cooling pad –again to sump</p> <p>6.3m x 2.1 m – 2 nos.</p>	28 sq.m		
02	Providing and fixing of 1-HP motor with suction and delivery pipeline arrangement from tank to cooling pad including the electrical power supply, wiring work and all materials	2 nos.		
03	Providing and fixing of Temperature controller with sensor unit, wiring to temperature controller unit with any other required materials to complete the work	2 nos		
04	Providing and fixing of single phase, axial slow speed exhaust fan with motor, wiring work to motor and connected to temperature controller and cooling pad pump , cutting of existing poly carbonate sheet and making of frame ,all work to complete size 3'x3'fan	4 nos		
05	Supplying of Single phase, axial slow speed exhaust fan with motor, for spare purpose	1 no.		
06	Providing of 1-HP mono block motor for spare.	1 no.		
Total				