



भाकृअनुप-राष्ट्रीय केला अनुसंधान केंद्र
(भारतीय कृषि अनुसंधान परिषद)
थोगमलै रोड, थायनूर पोस्ट,
तिरुचिरापल्लि. - ६२० १०२. तमिलनाडु

ICAR - National Research Centre for Banana
(Indian Council of Agricultural Research)

Thogamalai Road, Thayanur P.O.
Tiruchirapalli - 620 102, Tamil Nadu, India



F.No.9-4(55)/2017-2018-Estt.

Date: 08.09.2017

To 1. Indian green homes pvt ltd
No 7 namrata commercial centre,
Talegaon Dabhade station,
Mavel, Talegon Dabhade,
Maharashtra -410507

Sub : Repair of Transgenic Glass Houses at the ICAR – NRC for Banana, Trichy – Reg.

Sir/s,

Quotations are invited by the Director, ICAR – NRC for Banana, Trichy, from among the firms registered with GST for “Repair of Transgenic Glass House” at the ICAR – NRCB, Trichy, as per specifications given below:-

Sl. No.	Name of the work	Qty.
1.	Transgenic Glass House - as per specifications furnished overleaf	1 Job.
2.	Glass House - as per specifications furnished in enclosure	1 Job

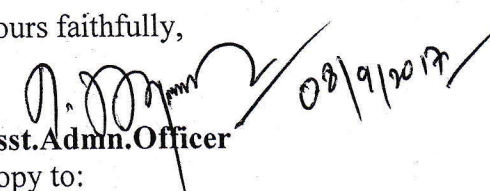
NOTE : RATES FOR MATERIALS AND LABOUR REQUIRED FOR “Repair of Transgenic Glass House and Glass House” as per the existing HAS TO BE QUOTED BY THE CONTRACTOR.

You are requested to quote your competitive rate (s) for undertaking the above work. Your quotation addressed to the Director, ICAR – National Research Centre for Banana, Thogamalai Road, Thayanur Post, Tiruchirapalli – 620 102 (T.N.), should reach this office on or before **23.09.2017 by 3.00PM** in a sealed cover superscribing “**Quotation for “Repair of Glass Houses” – Due on 23.09.2017 by 3.00PM**”.

The right to accept or to reject all or any of the quotation in part or full is reserved.

NOTE : You are requested to send your quotations through “SPEED POST” only and not through “COURIER SERVICE”.

Yours faithfully,


Asst. Adm. Officer

Copy to:

1. The Chairman (WLM)
2. The Chairman-PMEC for uploading in NRCB website
3. The Member Secretary (WLM)
3. Mr.D.R.C.Moorthy, Tech. Officer



**ICAR – NRC for Banana
Trichy – 620 102**

Details of work

i) Transgenic Glass House repair

Sl. No	Description	Quantity	Rate. Rs	Amount Rs.
01	Providing and fixing of Cooling pad size of thickness-4" (100mm) with UPVC enclosure (for rust free structure) for box type fixing arrangement for cooling pad with water inlet pipe 1" size (25mm) and water outlet pipe 4"size (100mm) upto ground water storage tank (all in UPVC materials) Completing the work, including fixing of cooling pads in a UPVC enclose arrangement, with valve arrangement, extra collecting arrangement for spill over water from cooling pad during running All inlet and outlet water supply arrangements from sump - cooling pad –again to sump 8"x4" -3Nos 7' x4 – 3Nos	20 sq.m		
02	Providing and fixing of 1-HP motor with suction and delivery pipeline arrangement from tank to cooling pad including the electrical power supply, wiring work and all materials	4 nos.		
03	Providing and fixing of Temperature controller with sensor unit, wiring to temperature controller unit with any other required materials to complete the work	3 nos		
04	Providing and fixing of single phase, axial slow speed exhaust fan with motor, wiring work to motor and connected to temperature controller and cooling pad pump , cutting of existing poly carbonate sheet and making of frame ,all work to complete	3 nos		
05	Supplying of Single phase, axial slow speed exhaust fan with motor, for spare purpose	1 no		
Total				

[Signature]
08/09/2017

**ICAR – NRC for Banana
Trichy – 620 102**

Details of work

ii) Glass House repair

Sl. No	Description	Qty	Rate. Rs	Amount Rs.
01	<p>Providing and fixing of Cooling pad size of thickness-4" (100mm) with UPVC enclosure (for rust free structure) for box type fixing arrangement for cooling pad with water inlet pipe 1" size (25mm) and water outlet pipe 4" size (100mm) upto ground water storage tank (all in UPVC materials)</p> <p>Completing the work, including fixing of cooling pads in a UPVC enclose arrangement, with valve arrangement, extra collecting arrangement for spill over water from cooling pad during running</p> <p>All inlet and outlet water supply arrangements from sump -cooling pad –again to sump</p> <p>6.3m x 2.1 m – 2 nos.</p>	28 sq.m		
02	Providing and fixing of 1-HP motor with suction and delivery pipeline arrangement from tank to cooling pad including the electrical power supply, wiring work and all materials	2 nos.		
03	Providing and fixing of Temperature controller with sensor unit, wiring to temperature controller unit with any other required materials to complete the work	2 nos		
04	Providing and fixing of single phase, axial slow speed exhaust fan with motor, wiring work to motor and connected to temperature controller and cooling pad pump , cutting of existing poly carbonate sheet and making of frame ,all work to complete size 3'x3'fan	4 nos		
05	Supplying of Single phase, axial slow speed exhaust fan with motor, for spare purpose	1 no.		
06	Providing of 1-HP mono block motor for spare.	1 no.		
Total				

[Handwritten Signature]
08/9/2017